


Kartušni filter za odstranitev peska
Glava in obroč iz polipropilena
Posoda v transparentnem AS
Priključki 1/2" na 90° z medeninastimi
vstavki in izhodom navzgor
Tesnila O – ring
Pralna kartuša iz najlona 50 µ
Max pretok 0,9 m3/h
Dimenzije (mm) A = 91, B = 165
Kartuša CRF 08
FCR08/F: kartuša z polipropilenskimi
zvitimi nitmi 25 µ
Kartuša CRF08/F



Sand removal (sediment) cartridge filter
Head and nut in polypropylene
Bowl in transparent AS
Connections 1/2" at 90° angle with
insert with top outlet. O – ring seal
Cartridge in washable net nylon 50 µ
Flow rate max 0,9 m3/h
Dimensions (mm) A = 91, B = 165
Cartirge CRF 08
FCR08/F: with wound polypropylene
thread cartirge 25 µ
Refill CRF08/F

Kartušni filter za odstranitev peska
Glava in obroč iz kromirane medenine
Posoda v transparentnem Trgoamid T
Priključki 1/2"
Tesnila O – ring
Pralna kartuša iz najlona 50 µ
Max pretok 0,9 m3/h
Dimenzije (mm) A = 95, B = 163
Kartuša CRF 08 (najlon)
FCP010/F: kartuša z polipropilenskimi
zvitimi nitmi 25 µ
Kartuša CRF08/F

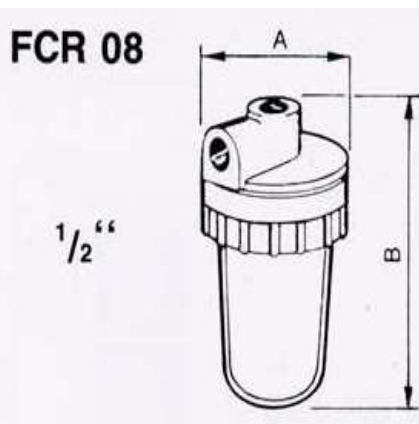

Sand removal (sediment) cartridge filter
Head and nut in plating brass
Bowl in transparent Trgoamid T
O – ring seals
Cartridge in washable net nylon 50 µ
Flow rate max 0,9 m3/h, Connection 1/2"
Dimensions (mm) A = 95, B = 163
Cartirge CRF 08 (najlon)
FCP010/F: with wound polypropylene
thread cartirge 25 µ
Refill CRF08/F

Kartušni filter za odstranitev peska
Glava in obroč iz polipropilena z zračniki
Posoda v transparentnem polikarbonatu
Priključki 3/4" – 1" na 90° z medeninastimi
vstavki in izhodom navzgor
Tesnila O – ring
Pralna kartuša iz najlona 50 µ
Max pretok 3/4" = 3,0 m3/h 1" = 4,0 m3/h
Dimenzije (mm) A = 126, B = 326
Kartuša CRF 35 (najlon)
FCR35/F: kartuša z polipropilenskimi
zvitimi nitmi 50 µ (možno tudi 1- 5 - 25 - 50
- 100 µ)
Kartuša CRF25/F




Sand removal (sediment) cartridge filter
Head and nut in plating brass&air valve
Bowl in transparent polycarbonate
Connections 3/4" – 1" at 90° angle with
insert with top outlet. O – ring seal
Cartridge in washable net nylon 50 µ
Flow rate max 3/4" = 3,0 m3/h 1" = 4,0 m3/h
Dimensions (mm) A = 126, B = 326
Cartirge CRF 35 (najlon)
FCR35/F: with wound polypropylene
thread cartirge 50 µ (by request 1 – 5 -
25 - 50 – 100 µ)
Refill CRF25/F

Kartušni filter za odstranitev peska
 Glava in obroč iz kromirane medenine
 Posoda v transparentnem Trogamid T
 Zračni ventil
 Priključki 3/4" M
 vstavki in izhodom navzgor
 Tesnila O – ring
 Kartuša iz najlona 50 µ
 Max pretok 3,0 m3/h
 Dimenzije (mm) A = 193, B = 302
 Kartuša CRF 35 (najlon)
FCP050/F: kartuša z polipropilenskimi
 zvitimi nitmi 30 µ (možno tudi 1- 5 - 25 - 50
 - 100 µ)
 Kartuša CRF25/F

FCP 050

3/4"

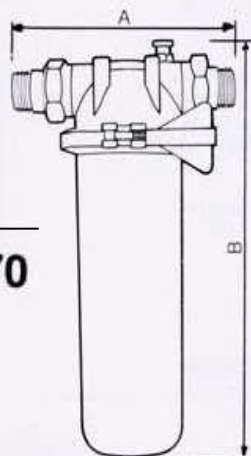

Sand removal (sediment) cartridge filter
 Head and nut in plating brass&air valve
 Bowl in transparent Trogamid T
 Cartirge CRF 35 (naylon)
 Connections 3/4" M
 O – ring seal
 Cartridge in washable net nylon 50 µ
 Flow rate max 3,0 m3/h
 Dimensions (mm) A = 193, B = 302
FCP050/F: with wound polypropilene
 cartirge 50 µ (by request 1 – 5 -
 25 - 50 – 100 µ)
 Refill CRF25/F

Kartušni filter za odstranitev peska
 Karakteristike enake kot pri modelu FCP 050
 Priključki 1" M
 Max pretok 4,0 m3/h
 Dimenzije (mm) A=193, B=302
FCP 070P: Enako kot FCP050/F

FCP 070

1"

Sand removal (sediment) cartridge filter
 All features alike the above FCP 050
 Connection 1" M
 Flow rate max 4,0 m3/h
 Dimensions (mm) A = 193, B = 302
FCP 070P: The same as for FCP050/F

Kartušni filter za odstranitev peska
 Karakteristike enake kot pri modelu FCP 050
 Priključki 1 1/4" M
 Max pretok 5,5 m3/h
 Dimenzije (mm) A=200, B=320
FCP 090F: Enako kot FCP050/F

FCP 090


1 1/4"

Sand removal (sediment) cartridge filter
 All features alike the above FCP 050
 Connection 1 1/4" M
 Flow rate max 5,5 m3/h
 Dimensions (mm) A = 200, B = 320
FCP 090F: The same as for FCP050/F

Kartušni filter za odstranitev peska
 Glava in obroč iz kromirane medenine
 Posoda v transparentnem Trogamid T
 Zračni ventil
 Priključki 1 1/2" F
 Tesnila O – ring
 Kartuša iz inox jekla 50 µ
 Max pretok 10 m3/h
 Dimenzije (mm) A = 155, B = 340
 Kartuša CXT 120 (pralna)

FCP 120

1 1/2"

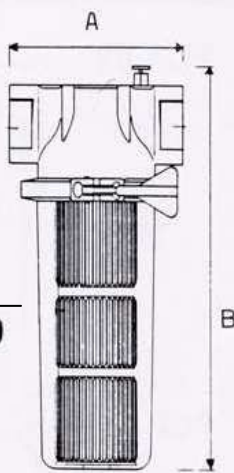

Sand removal (sediment) cartridge filter
 Head and nut in plating brass&air valve
 Bowl in transparent Trogamid T
 Connections 1 1/2" F
 O – ring seal
 Cartridge in stainless steel pleated 50 µ
 Flow rate max 10 m3/h
 Dimensions (mm) A = 155, B = 340
 Refill CXT 120 (washable)

Kartušni filter za odstranitev peska
 Karakteristike enake kot pri modelu FCP 120
 Priključki 2" F
 Max pretok 15 m3/h
 Dimenzije (mm) A = 155, B = 340


FCP 180

2"

Sand removal (sediment) cartridge filter
 All features alike the above FCP 120
 Connections 2" F
 Flow rate max 15 m3/h
 Dimensions (mm) A = 155, B = 340

Samočistilni kartušni filter
 Glava in obroč iz kromirane medenine
 Posoda v transparentnem Trogamid T
 Zračni ventil
 Priključki 3/4" M
 Tesnila O – ring
 Kartuša iz inox jekla AISI 304 50-90 µ
 Min – max tlak (bar): 2,0 - 10
 Max pretok 3 m3/h
 Krožni ventil za protismerno pranje kartuše
 Dimenzije (mm) A = 193, B = 385

FTA 050

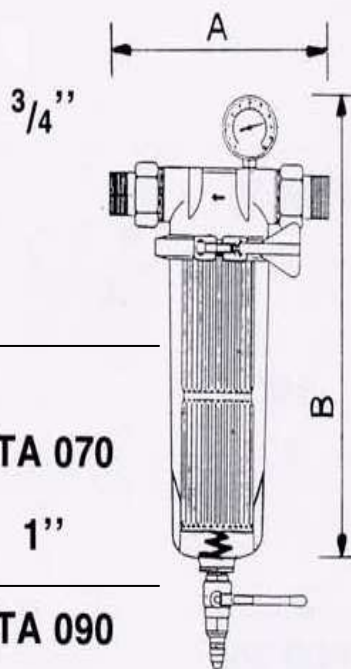

Self – cleaning sediment filter
 Head and nut in plating brass&air valve
 Bowl in transparent Trogamid T
 Connections 3/4" M; O – ring seal
 Pressure gauge to check pressure drop
 Cartridge in stainless steel pleated AISI 304, supported by a spring of the same material 50 - 90 µ
 Flow rate max 3 m3/h
 Manometer za kontrolo izgub tlaka
 Ball – valve for hand driving the backwash of the filtering element
 Pressure min-max (bar): 2,0 – 10,0
 Dimensions (mm) A = 193, B = 385

Samočistilni kartušni filter
 Karakteristike enake kot pri modelu FTA 050
 Priključki 1" M
 Max pretok 4,0 m3/h
 Dimenzije (mm) A=193, B=385

FTA 070

1"

Self – cleaning sediment filter
 All features alike the above FTA 050
 Connection 1" M
 Flow rate max 4,0 m3/h
 Dimensions (mm) A = 193, B = 385

Samočistilni kartušni filter
 Karakteristike enake kot pri modelu FTA 050
 Priključki 1 1/4" M
 Max pretok 5,5 m3/h
 Dimenzije (mm) A=193, B=385

FTA 090


1 1/4"

Self – cleaning sediment filter
 All features alike the above FTA 050
 Connection 1 1/4" M
 Flow rate max 5,5 m3/h
 Dimensions (mm) A = 193, B = 385

Samočistilni kartušni filter
 Karakteristike enake kot pri modelu FTA 050
 Priključki 1 1/2" F
 Max pretok 8,5 m3/h
 Dimenzije (mm) A=154, B=450

FTA 120

1 1/2"

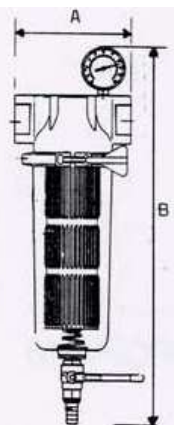

Self – cleaning sediment filter
 All features alike the above FTA 050
 Connection 1 1/2" F
 Flow rate max 8,5 m3/h
 Dimensions (mm) A = 154, B = 450

Samočistilni kartušni filter
 Karakteristike enake kot pri modelu FTA 120
 Priključki 2" M
 Max pretok 10,5 m3/h
 Dimenzije (mm) A=154, B=450

FTA 180

2"

Self – cleaning sediment filter
 All features alike the above FTA 120
 Connection 2" M
 Flow rate max 10,5 m3/h
 Dimensions (mm) A = 154, B = 450

Menjalne kartuše Refills

